


# Loud speaker cables

## Cables haut-parleur

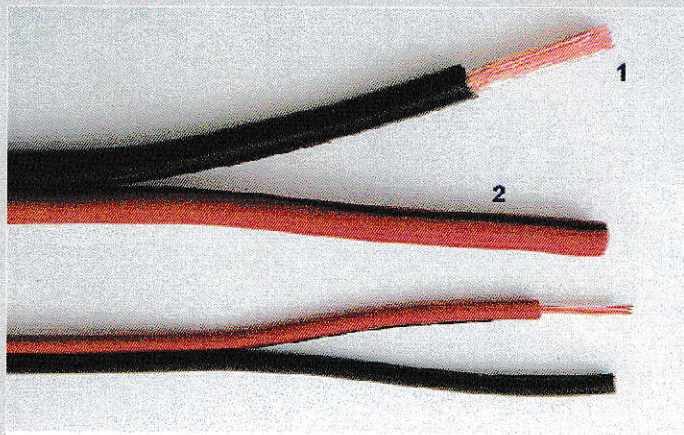

Structure self-explaining article \ Code article auto-explicatif

PRN	N° cond. + sec Aderzahl+ Querschnitt	Red/Black	HA
PAN		Rooge/Noir	
PBB		Light Blue/Black	
PBN		Azur/Noir	
PTB		White/Blue	
PTN		Blanche/Bleu	
PTM		White/Black	
PTT		Blanche/Noir	
PTA		White	
PTO		Blanche	
		Black	
		Noir	
		Brown	
	Marron		
	Trasparent		
	Trasparent		
	Silver		
	Argento		
	Gold		
	Or		

1	Conductor flexible bare copper Conducteur cuivre nu, souple
2	Insulation: PVC flame retardant acc. to CEI 20-22 II° and IEC 332-3C, Isolation: PVC ignifuge selon CEI 20-22 II° et IEC 332-3C

### Technical data/Données techniques

Nominal voltage Voltage nominal	220 V	Conductor resistance Résistance isolation	< 80 Ohm/km (0,25 mmq)
Test voltage Voltage essai	2000 V		< 59 Ohm/km (0,35 mmq)
Temperature range Plage température	- 10 °C + 80 °C		< 38 Ohm/km (0,50 mmq)
Radiation resistance Résistance radiation	80 Mrad		< 25 Ohm/km (0,75 mmq)
Min. bending radius Min. rayon courbure	12 x Ø		< 19 Ohm/km (1,00 mmq)
Insulation resistance Isolationwiderstand	> 200 MOhm x km	Capacitance Capacité	< 13 Ohm/km (1,50 mmq)
			< 10 Ohm/km (2,00 mmq)
			< 8 Ohm/km (2,50 mmq)
			< 5 Ohm/km (4,00 mmq)
			cond./cond. approx. 130 pF/m
			cond./cond. environ 130 pF/m

Ramcro Code	Description	Outer Ø mm
Ramcro Art. Nr.	Description	Ø extérieur mm
...0226HA	2x0,25 mmq	1,2x2,4
...0235HA	2x0,35 mmq	1,5x3,0
...0250HA	2x0,50 mmq	1,8x3,6
...0275HA	2x0,75 mmq	2,0x4,0
...0210HA	2x1,00 mmq	2,3x4,6
...0215HA	2x1,50 mmq	2,5x5,0
...0220HA	2x2,00 mmq	3,0x6,0
...0225HA	2x2,50 mmq	3,3x6,6
...0240HA	2x4,00 mmq	4,3x8,6

### Application/Application

Flat cables for the connection of loudspeakers to hifi equipment. The broad range of different colours meets the individual esthetical demands of the market.

Cables meplat pour haut-parleur. Ces cables sont disponibles en diferentes coluleurs.

### Standards/Normes

CEI 20-11	CEI 20-22 II
CEI 20-20	IEC 332-3C

### Colour code/Code couleur

See the table  
Consultez la tableau

### Packing/Conditionnement

Drums of 500 m and coils of 100 m each  
Tourets de 500 m ou couronnes 100 m chacune